



**Product Features**


- for hydraulic balancing of hot water return systems (PWH-C), supports thermal disinfection
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- isolating unit with temperature sensor pocket
- PTFE seat gasket
- thermostatic regulating unit
- male union thread
- with plugged Drain Port
- free from dead spots
- no DVGW approval needed because it deviates from DVGW worksheet W 551

**Standards and Approvals**

- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

**Technical Data**

- control range 30 °C - 50 °C
- pressure rating PN 16
- max. operating temperature 90 °C

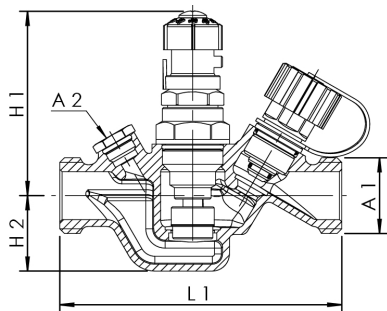

part no.	DN	A1	A2	H1 (mm)	H2 (mm)	L1 (mm)	cv (m³/h)	kg
1400G01500	15	G 3/4	G 1/4	85	28	110	1,43	0,69
1400G02000	20	G 1	G 1/4	85	33	123	1,90	0,871
1400G02500	25	G 1 1/4	G 1/4	96	34	133	2,93	1,14

**accessory**

- gunmetal sampling valve, figure 187 00
- insulation shell for MULTI-THERM automatic double-regulating valve, figure 471 11
- drain valve made of gunmetal/plastic, figure J7109 173 00
- Pt 1000 temperature sensor, figure T5100 140 00
- dial thermometer, figure T5100 150 00
- gunmetal solder union connector, figure 476 04
- gunmetal union connector, union nut, FPT, figure 476 06
- gunmetal union connector, union nut, FPT, with drain valve, figure 476 07
- gunmetal union connector, union nut, MPT, figure 476 08
- solder / pressfit union connector, figure 476 14
- pressfit union connector, MAPRESS stainless steel and copper, figure 476 22
- pressfit union connector, SANPRESS and PROFIPRESS, figure 476 30
- pressfit union connector, SANHA and NiroSan, figure 476 35
- pressfit union connector, MEPLA, figure 476 40
- pressfit union connector, MAPRESS stainless steel, figure 476 20
- pressfit union connector, SANPRESS INOX, figure 476 70
- pressfit union connector for Viega RAXOFIX, figure 476 32